


A product description of Monostrand Hydraulic Jack:

Mono Strand Pulling Jack Is a multi-purpose pre-stressed tensioning device, easy to operate. Mainly used for single hole tensioning. But also for porous preload, tension and troubleshooting, and can be applied to a variety of sizes of high-strength steel wire and strand.

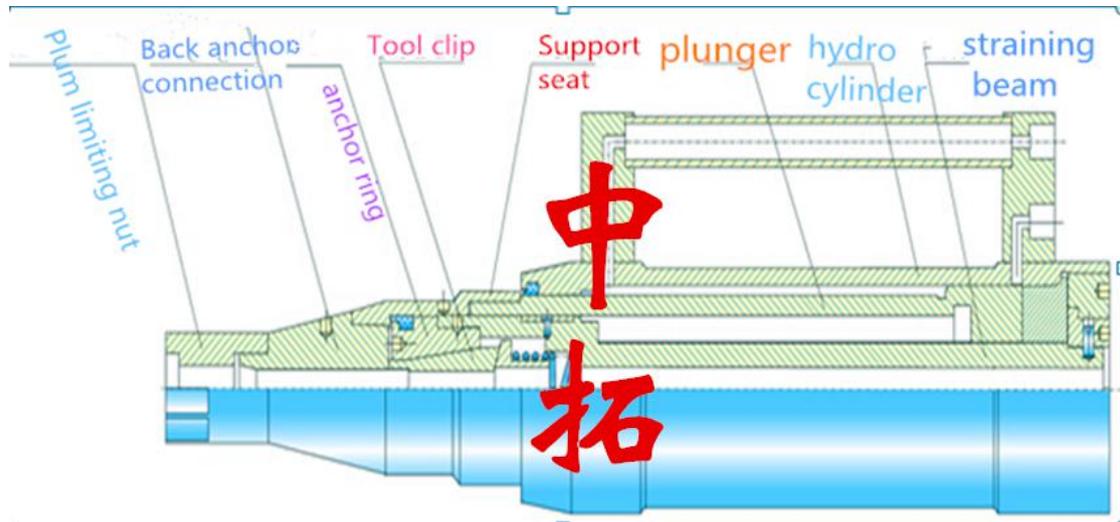

Two products use of Mono Strand Pulling Jack:

Widely used in **monostrand jack** of large-scale buildings, structures, prestressed concrete bridge, rock anchor, hydraulic structure, foundation anchorage and other major projects.



Three product parameters of stressing jacks :

project	unit	Value
Nominal tension	KN	257
Nominal oil pressure	MPA	50
Tension piston area	M2	5.137*10
Return piston area	M2	1.335*10
Piercing hole diameter	MM	19
Trolley trip	MM	200
Dimensions	MM	180*568
Return oil pressure	MPA	Less than or equal to 25

Four before the card jack use Note of monostrand jack:

QYC type front jack jack is a **Mono Strand Pulling Jack** the internal use of repeated use of the tool anchor, in the work can automatically clamp and release the tool anchor clip, mainly for the BM15, BM13 all kinds of sticky A single stretch of knots and unbonded tendons.

Function Reminder: QYC type front **stressing jacks** can be configured according to user requirements of different size of the length of the top sets, retractors, for the test by the root of the pre-tensioning, tension back anchor, cable cable single cable use. **mono stressing jack**